

DLED12 DMX



- 220W studio light
- Active cooling
- dedolight double-aspheric optics
- Huge focus range, 60°-5°.
With non-spherical, wide-angle attachment 85°-54°
- Weight: 11 kg



DLED12-D-DMX daylight version

All DLED12 lights can be controlled manually, as well as by DMX

DLED12-BI-DMX bicolor version


Bicolor fixture, tunable between 2700K - 6500K

Pole-operated version (added price)

Motorized versions on demand



DP1200KU




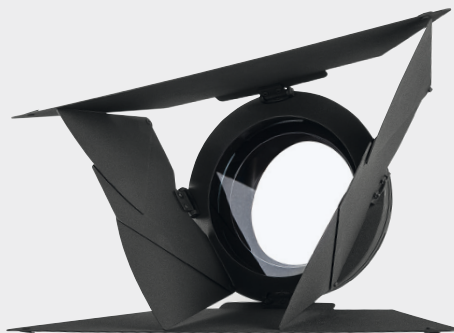


DLWA1200R



DPBA-L18

| DLED12-BI-DMX | | |
|---|---|----------|
| Focusing range | 60° - 5° | |
| Intensity range | 1 : 11 | |
| CCT | 2700 - 6500 | |
| | daylight | tungsten |
| CRI Ra | 97 | 96 |
| CRI Re | 95 | 94 |
| TLCI | 96 | 97 |
| Delta UV | -0.0011 | 0.0015 |
| Lux in 3 m flood position | 933 | |
| Lux in 3 m spot position | 10.100 | |
| Lux in 3 m with parallel beam attachment DPBA-L18 | 13.774 | |
| Input voltage | 90 - 264 VAC | |
| Power consumption | 308 W | |
| Size | 484,2 x 323,4 x 542,7 mm 19.1 x 12.7 x 21,4 inches | |
| Weight | 11 kg 24.3 lbs | |

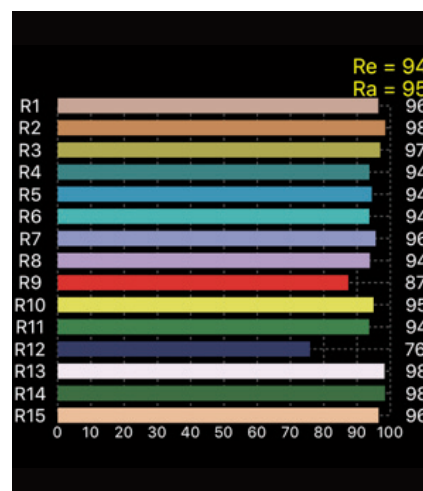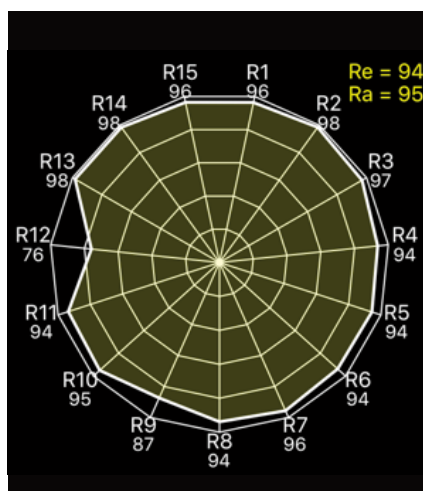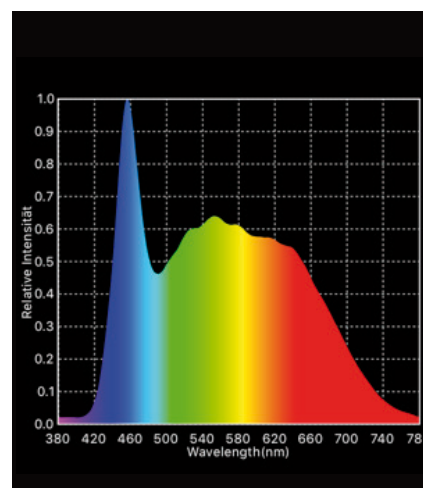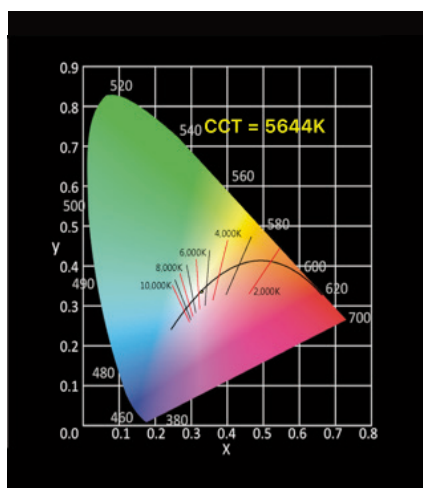

| DLED12-BI-DMX Bicolor | | in daylight function 5600K | | | | | | |
|------------------------------|--|-----------------------------------|--|--|--|--|--|--|
|------------------------------|--|-----------------------------------|--|--|--|--|--|--|

| | | | | | | | | |
|----------------------|-------|--------|--------|--------|-------|-------|------|------|
| distance | Meter | 1 | 2 | 3 | 5 | 10 | 15 | 20 |
| Diameter of lit area | Meter | 1.10 | 2.10 | 3.20 | 5.30 | 10.60 | 16 | 21 |
| Flood 65° | Lux | 8.400 | 2.100 | 933 | 336 | 84 | 37 | 21 |
| Diameter of lit area | Meter | 0.23 | 0.46 | 0.68 | 1.10 | 2.30 | 3.40 | 4.60 |
| Medium 13° | Lux | 20.800 | 5.200 | 2.310 | 832 | 208 | 93 | 52 |
| Diameter of lit area | Meter | 0.10 | 0.17 | 0.26 | 0.44 | 0.87 | 1.30 | 1.70 |
| Spot 4° | Lux | 90.900 | 22.725 | 10.100 | 3.636 | 909 | 404 | 227 |

| DLED12-BI-DMX Bicolor | | in tungsten function 3200K | | | | | | |
|------------------------------|--|-----------------------------------|--|--|--|--|--|--|
|------------------------------|--|-----------------------------------|--|--|--|--|--|--|

| | | | | | | | | |
|--------|-----|--------|--------|-------|-------|-----|-----|-----|
| Flood | Lux | 6.930 | 1.733 | 770 | 277 | 70 | 31 | 17 |
| Medium | Lux | 16.900 | 4.225 | 1.877 | 679 | 169 | 75 | 42 |
| Spot | Lux | 76.500 | 19.125 | 8.500 | 3.060 | 765 | 340 | 191 |



Dedo Weigert Film GmbH

Karl-Weinmair-Straße 10
D-80807 Munich, Germany

Phone: +49-(0)89 - 356 16 01
Fax: +49-(0)89 - 356 60 86

info@dedoweigertfilm.de
www.dedoweigertfilm.de